

ACO grease separator LipuMobil-P type 0.8

For flexible installation


The contents of regular mobile grease separators have to be emptied through manual skimming. This leads to significant odour release, as the cover of the separator has to be removed.

The new grease separator for mobile installation ACO LipuMobil-P is optionally also available with a pre-installed external grease storage tank.

The pre-attached manual discharge attached to the external grease storage tank allows grease extraction from the separator. It is not required to open the cover to extract the grease.

The storage tank can store up to 10 liters of grease. If the maximum capacity has been reached, the storage can easily be removed from the separator, and the extracted grease can be stored in a larger, separate collecting tank.

Optionally it is possible to equip the separator with wheels connected at the bottom side of the separator. When installed with flexible pipe connections, the separator then can be removed from the drainage system and the separator can easily be transported to a designated disposal area.

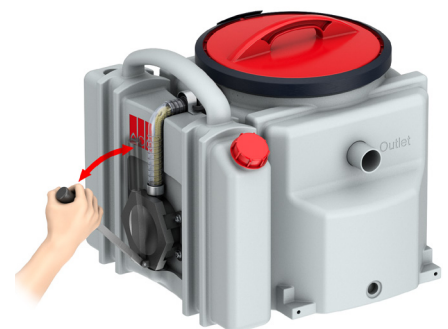

Product overview



ACO grease separator LipuMobil-P type 0.8 (tested according to EN 1825) from polyethylene



Product information



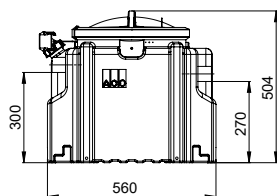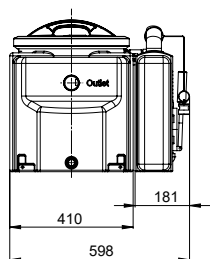

- For free-standing installation in frost-proof areas, odour-proof sealed, with removable cover and fastening ring
- Inlet and outlet DN 50 (OD 50 mm) for connection with fitting pipe systems
- Total volume: 48 liters
- Grease storage volume: 15 liters
- Sludge storage volume: 16 liters
- Optionally with grease storage tank from PE, mounted at the separator, with discharge pump, volume 10 liters
- German approval Z-54.6-546 (valid only in Germany)
- Type test report for flow rate (NS): 60143586-001
- Suitable for flow rates up to 0.8 l/s

Dimensioned drawing



Execution	Art. no.	Price w/o VAT
Without grease storage tank	3700.04.00	490,00 €
With grease storage tank (operating side right)	3700.04.10	1035,00 €
With grease storage tank (operating side left)	3700.04.20	1035,00 €

Accessories

	Description	Art. no.	Price w/o VAT
	■ Set of wheels consisting of four wheel, two with manual stoppers for tank fixation	3700.04.30	186,00 €
	■ Extraction valve for tank discharge	3700.04.40	9,90€
	■ Collecting tank, 60 liters capacity, odour-proof with fastening ring	7600.00.15	165,90€
	■ Shut-off valve DN 50 for inlet pipe	0175.18.33	138,00 €