

ACO Grease Separator Lipumax P-X

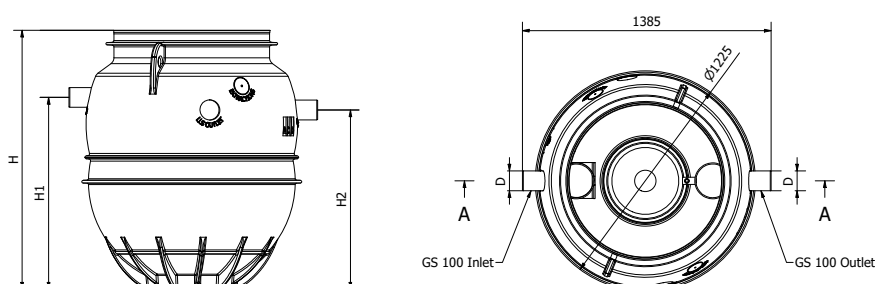
Product information

Grease separator of polyethylene for below ground installation

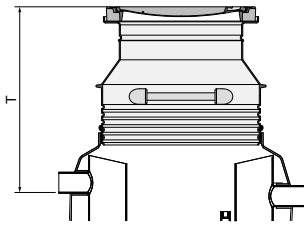
- according to EN 1825 and DIN 4040-100
- certificate
 - 7310374-01a (NS 2, NS 4)
 - 7310372-01 (NS 5.5)
- inlet and outlet connection according to outside diameter D depending on nominal size of separator
- disposal and cleaning via cover
- installation depths and suitable top sections, page 30



Lipumax P-X – Order data

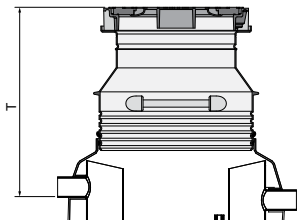


Nominal size	Nominal width	Volume sludge trap	Volume grease storage	Total capacity	D	H1	H2	T	Weight	Article No.
		[l]	[l]	[l]	[mm]	[mm]	[mm]		[kg]	[grey]
NS 2/200	DN 100	241	270	731	110	1015	945	430	59.7	3202.42.00
NS 2/400	DN 100	516	270	1009	110	1286	1216	430	69.6	3202.42.10
NS 4/400	DN 100	516	270	1009	110	1286	1216	430	69.6	3204.42.00
NS 4/800	DN 100	998	270	1476	110	1768	1698	430	86.2	3204.42.10
NS 5.5/550	DN 150	569	230	1465	160	1745	1675	450	89.8	3205.42.00

Top section 600, load class A 15 – Order data

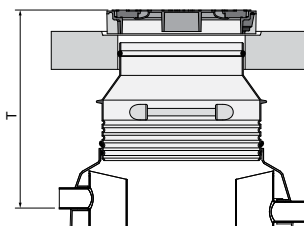
- load class A 15 according to EN 124
- frame from concrete, cover from cast iron
- clear opening Ø 600 mm
- cover odour proof sealed
- raising tube from polyethylene

	NS 2 ST 200	NS 2 ST 400	NS 4 ST 400	NS 4 ST 800	NS 5.5 ST 550	Weight	Article No.
						[kg]	[grey]
T [mm]	970–1060	970–1060	970–1060	970–1060	990–1080	107	3300.34.11
	970–1510	970–1510	970–1510	970–1510	990–1530	111	3300.34.12
	970–2110	970–2110	970–2110	970–1732	990–1755	119	3300.34.13

Top section 600, load class B 125 – Order data

- load class B 125 according to EN 124
- frame from cast iron, cover BEGU
- clear opening Ø 600 mm
- cover odour proof sealed
- raising tube from polyethylene

	NS 2 ST 200	NS 2 ST 400	NS 4 ST 400	NS 4 ST 800	NS 5.5 ST 550	Weight	Article No.
						[kg]	[grey]
T [mm]	1005–1095	1005–1095	1005–1095	1005–1095	1025–1115	110	3300.55.11
	1005–1545	1005–1545	1005–1545	1005–1545	1005–1565	118	3300.55.12
	1005–2145	1005–2145	1005–2145	1005–1732	1005–1755	128	3300.55.13

Top section 600, load class D 400 – Order data

- load class D 400 according to EN 124
- frame from cast iron, cover BEGU
- clear opening Ø 600 mm
- cover odour proof sealed
- adapter plate from concrete Ø 1000 mm x 150 mm
- raising tube from polyethylene
- selectively with load distribution plate from concrete Ø 2000 mm x 200 mm

Load distri- bution plate	Raising tube length	NS 2 ST 200	NS 2 ST 400	NS 4 ST 400	NS 4 ST 800	NS 5.5 ST 550	Weight	Article No.
							[kg]	[grey]
with	short	1015–1100	1015–1100	1015–1100	1015–1100	1035–1120	1496	3300.56.18
with	medium	1015–1550	1015–1550	1015–1550	1015–1550	1035–1570	1504	3300.56.19
with	long	1015–2150	1015–2150	1015–2150	1015–1732	1035–1755	1516	3300.56.20
without	short	1015–1100	1015–1100	1015–1100	1015–1100	1035–1120	186	3300.57.08
without	medium	1015–1550	1015–1550	1015–1550	1015–1550	1035–1570	194	3300.57.09
without	long	1015–2150	1015–2150	1015–2150	1015–1732	1035–1755	198	3300.57.10