

ACO Light Liquid Separator Oleopator P-X

Class I

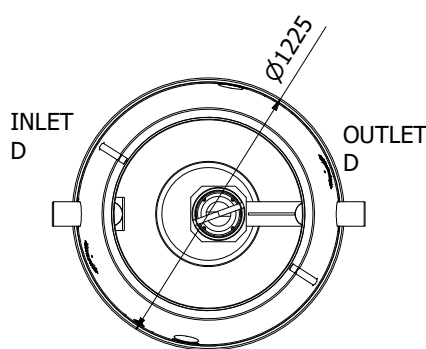
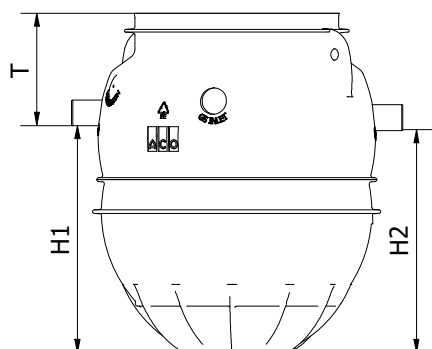
Product information

Light liquid separator of polyethylene for below ground installation

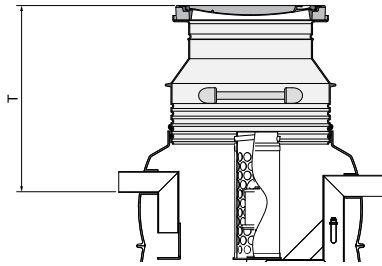
- according to EN 858
- certificate
 - 7310434-01 (NS 3)
 - 7310434-02 (NS 6)
 - 7310434-03 (NS 8)
 - 7310434-03 (NS 10)
- inlet and outlet connection according to outside diameter D depending on nominal size of separator
- inlet and outlet parts of polyethylene
- with integrated removable coalescing filter
- automatic closure device with float switch, density of float switch: 0.9 g/cm³



Oleopator P-X – Order data

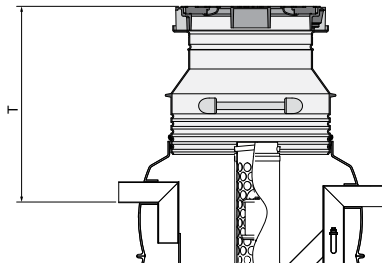


Nominal size	Nominal width	Volume sludge trap	Volume oil storage	Total capacity	D	H1	H2	T	Weight	Article No.
		[l]	[l]	[l]	[mm]	[mm]	[mm]	[mm]	[kg]	[grey]
NS 3/300	DN 100	381	240	731	110	966	946	480	63	3903.42.00
NS 3/600	DN 100	661	240	1009	110	1236	1216	480	73	3913.42.00
NS 3/900	DN 100	927	240	1272	110	1448	1428	480	89	3923.42.00
NS 6/450	DN 150	445	235	761	160	993	973	455	65	3926.42.00
NS 6/600	DN 150	702	235	1036	160	1263	1243	455	73	3906.42.00
NS 6/1200	DN 150	1180	235	1529	160	1745	1725	455	79	3916.42.00
NS 8/800	DN 150	780	260	1246	160	1475	1455	455	89	3908.42.00
NS 10/320	DN 150	318	260	802	160	993	973	455	66	3911.42.00
NS 10/1000	DN 150	1057	260	1529	160	1745	1725	455	79	3910.42.00

Top section 600, load class A 15 – Order data

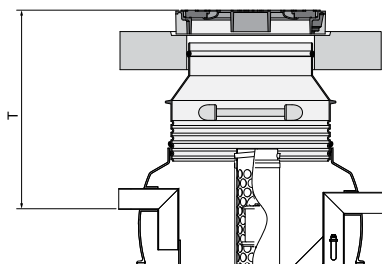
- load class A 15 according to EN 124
- frame and cover from BEGU
- clear opening Ø 600 mm
- cover loosely applied
- raising tube from polyethylene

	NS 3 ST 300 ST 600	NS 3 ST 900	NS 6 ST 450 ST 600	NS 6 ST 1200	NS 8 ST 800	NS 10 ST 320	NS 10 ST 1000	Weight	Article No.
								[kg]	[grey]
T [mm]	1020–1110	1020–1110	995–1085	995–1085	995–1085	995–1085	995–1085	96	3301.34.11
	1020–1560	1020–1560	995–1535	995–1535	995–1535	995–1535	995–1535	104	3301.34.12
	1020–2160	1020–2052	995–2135	995–1755	995–2025	995–2135	995–1755	115	3301.34.13

Top section 600, load class B 125 – Order data

- load class B 125 according to EN 124
- frame and cover from BEGU
- clear opening Ø 600 mm
- cover loosely applied
- raising tube from polyethylene

	NS 3 ST 300 ST 600	NS 3 ST 900	NS 6 ST 450 ST 600	NS 6 ST 1200	NS 8 ST 800	NS 10 ST 320	NS 10 ST 1000	Weight	Article No.
								[kg]	[grey]
T [mm]	1055–1145	1055–1145	1030–1120	1030–1120	1030–1120	1030–1120	1030–1120	121	3301.55.11
	1055–1595	1055–1595	1030–1570	1030–1570	1030–1570	1030–1570	1030–1570	129	3301.55.12
	1055–2195	1055–2052	1030–2170	1030–1755	1030–2025	1030–2170	1030–1755	140	3301.55.13

Top section 600, load class D 400 – Order data

- load class D 400 according to EN 124
- frame and cover from BEGU
- clear opening Ø 600 mm
- cover loosely applied
- raising tube from polyethylene
- selectively with load distribution plate from concrete
Ø 1500 mm or Ø 2000 mm x 200 mm

Load dis- tribution plate	Raising tube length	NS 3 ST 300 ST 600	NS 3 ST 900	NS 6 ST 450 ST 600	NS 6 ST 1200	NS 8 ST 800	NS 10 ST 320	NS 10 ST 1000	Weight	Article No.
									[kg]	[grey]
with	short	1065–1150	1065–1150	1040–1125	1040–1125	1040–1125	1040–1125	1040–1125	903	3301.56.08
with	medium	1065–1600	1065–1600	1040–1575	1040–1575	1040–1575	1040–1575	1040–1575	911	3301.56.09
with	long	1065–2200	1065–2052	1040–2175	1040–1755	1040–2025	1040–2175	1040–1755	1572	3301.56.20
without	short	1065–1150	1065–1150	1040–1125	1040–1125	1040–1125	1040–1125	1040–1125	186	3301.57.08
without	medium	1065–1600	1065–1600	1040–1575	1040–1575	1040–1575	1040–1575	1040–1575	194	3301.57.09
without	long	1065–2200	1065–2052	1040–2175	1040–1755	1040–2025	1040–2175	1040–1755	198	3301.57.10